


## Key benefits & features

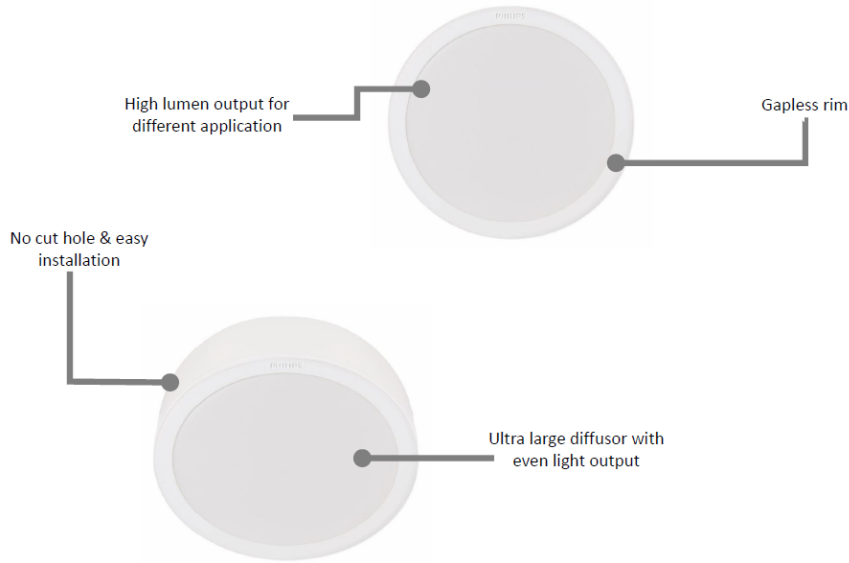

## 594xx, Meson G3

Application :	Downlight, On off
Color / Shape:	White, Round(All sizes) / Square (4/5/6") / Surface Mount, Round (6/8")
Material / Finish :	Synthetics
Wattage / Lumen/ Voltage :	3" 3.5W, 6W, 5&7W(PK)/ 250lm, 400lm, 320lm/500lm(PK) 3.5" 5W/ 350lm 4" 7W, 9W/ 500lm, 600lm 5" 9W, 13W/ 650lm, 900lm 6" 17W / 1200lm 7" 21W / 1400lm 8" 24W / 1700lm
Voltage /Color Temp :	220-240V 3000K, 4000K, 6500K
Dimensions (L X W X H) / cut out :	3" 95x95x45.5mm / Ø80mm (Round) 3.5" 105x105x45.5mm / Ø90mm (Round) 4" 120x120x47mm / Ø105mm (Round/ Square) 5" 140x140x47mm / Ø125mm (Round/ Square) 6" 165x165x47mm / Ø150mm (Round/ Square) 6" 172x172x55mm/ (Surface Mount- Round) 7" 190x190x47mm / Ø175mm (Round) 8" 215x215x47mm / Ø200mm (Round) 8" 222x222x55mm/ (Surface Mount- Round)
Extra Feature :	Eco – Friendly materials, easy Installation, affordable price

### Essential



Glare reduction



Bright light with uniform distribution



Non-visible flickering



Easy to install



## 594xx Meson – Specifications



Parameters	Specification
Cut hole size	80 / 90 / 105 / 125/ 150/ 175/ 200mm
Housing / Heat sink	Synthetic
Finish	Satin Matt
Lens	PS
Driver	Integrated
Average Lumen output	250,320, 350, 400, 500, 600, 650, 900, 1200,1400,1700lm
System lifetime	Up to 15,000 hrs
Beam angle	100
Operating voltage	220V ~ 240V
System wattage	3.5/ 5 /6/ 7 / 9/ 13/ 17/ 21/ 24W
Average efficacy	≥66lm/w
Spring Clips	Metal with plastic co-molding
User Manual	Included
Packaging	White box

