

Product Code: EMDLED3WMBULK2

Description: 3W LED IP65 Maintained Emergency Bulkhead



General Information

Dimensions (mm)	345 x 110 x 60
Materials	Polycarbonate Housing
Mounting	Ceiling or Wall
Weight (Kg)	0.6
Warranty (Years)	3

Supply & Power

Supply Voltage (V AC)	220 - 240
Frequency (Hz)	50
Electrical Safety	Charge & Discharge Protection

Environment

Ingress Protection	IP65
Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	<90

Accessories EMBAT3.6V1200SER: 3.6V 1200mAh Ni-Cd Battery
 EMBULK2FLUSH: Bulkhead Flush Kit
 EMBULKLGD: Emergency Bulkhead Legend

Features Legend Included


Standards BS EN 60598-2-22

Luminaire Output


Colour Temperature (K)	5500
Mains Luminous Flux (Lm)	120
Emergency Luminous Flux (Lm)	100
LED Lamp Type	8 x SMD 2835

Emergency Information

Emergency Operation	Maintained or Non-Maintained
Status Indication	Green LED
Battery Specification	3.6V 1200mAh Ni-Cd
Battery Duration (Hours)	3

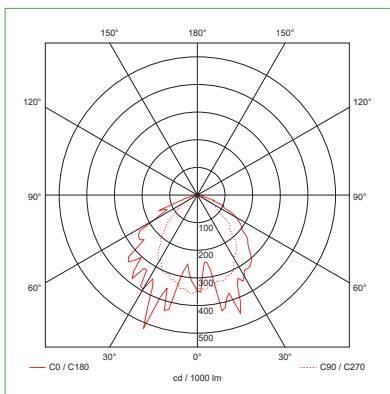

Mains

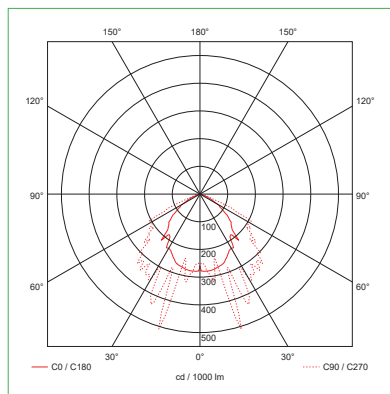

Emergency

Escape Route 1 lux min

Mounting Height	Axial/Wall		Transverse/Axial		Transverse/Wall
	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	2.2	5	5.8	6.7	2.5
2.5m	2.2	5.7	6.5	7.4	2.7
3.0m	2.4	6.1	6.8	7.6	2.8

Illuminance values based on a maintenance factor of 0.85

